
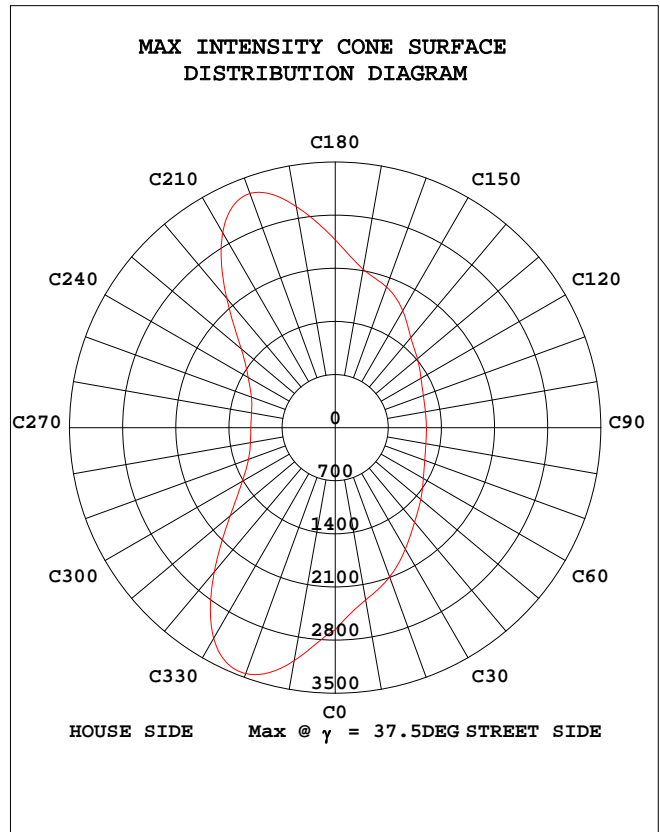


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 183.82 lm/W			
MODEL	SZG553	I _{max} (cd)	3447	η street_up(%)	0.1
NOMINAL POWER(W)	36	LOR(%)	100.0	η street_down(%)	42.2
RATED VOLTAGE(V)	31	TOTAL FLUX(lm)	6617	η house_up(%)	0.1
NOMINAL FLUX(lm)	6617.49	MAXIMUM @(C,γ)	340,37.5	η house_down(%)	57.7
LAMPS INSIDE	1	η up(%)	0.2	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	31	η down(%)	99.8	SLI	19.388

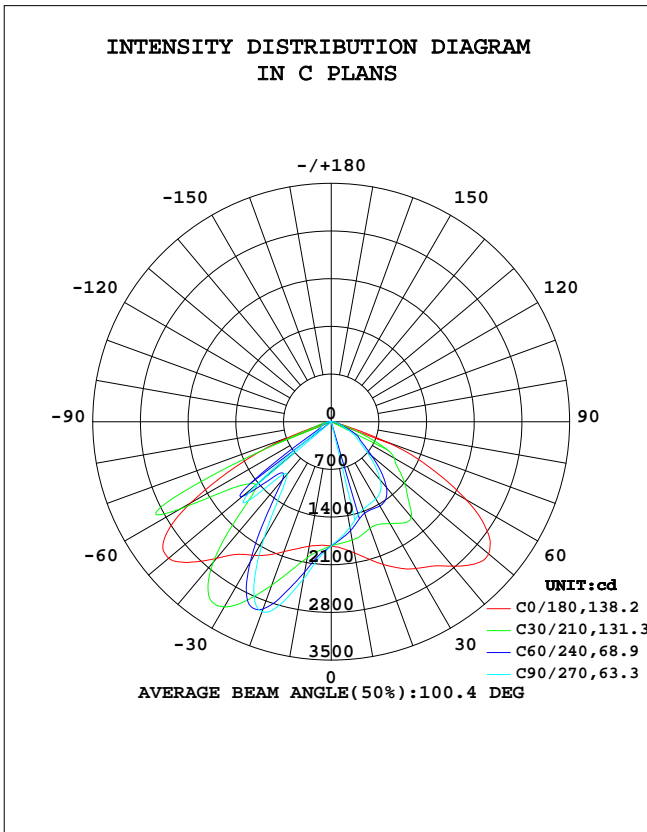


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd SUR.:		Shielding Angle:N/A

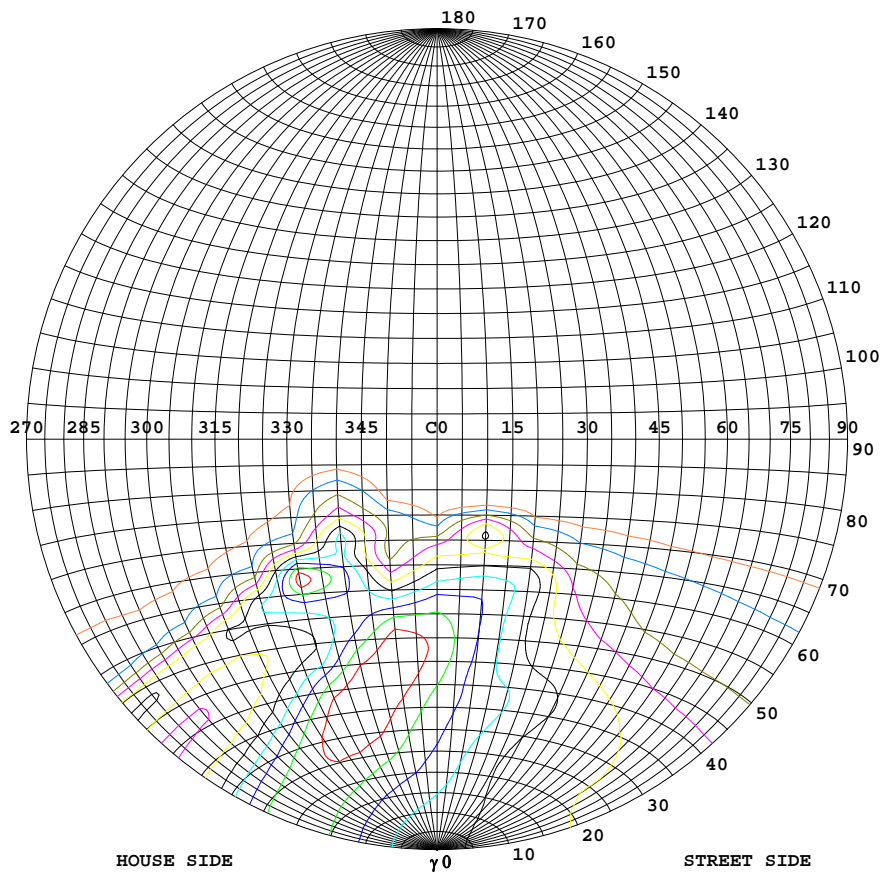

Classification:


IES:Type V - Very Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Semi-cut-off
 Max.At80:88.15cd/klm
 Max.At90:0.8269cd/klm
 Max.80-90:88.15cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3447
90%	3103
80%	2758
70%	2413
60%	2068
50%	1724
40%	1379
30%	1034
20%	689
10%	345
5%	172

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

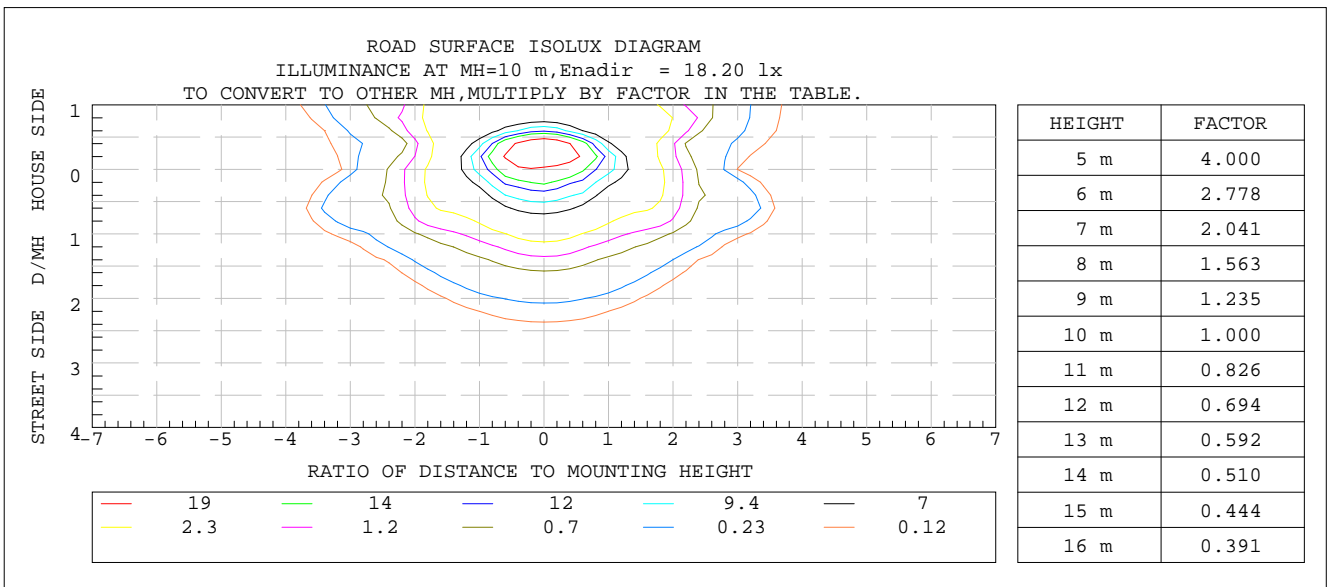

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
Humidity: 56.4%
Test Distance: 26.000m [K=1.4046]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd SUR.:		Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum,lamp
10	1955	1688	1575	1643	1856	2133	2340	2198	0- 10	178.5	178.5	2.7,2.7
20	2228	1511	1367	1460	2030	2776	2967	2856	10- 20	580.8	759.3	11.5,11.5
30	2488	1536	1310	1460	2266	2854	1977	2965	20- 30	1006	1765	26.7,26.7
40	2769	1494	1118	1439	2619	1607	1009	1840	30- 40	1229	2994	45.2,45.2
50	3016	1027	675.2	1020	3117	1354	1412	1399	40- 50	1296	4290	64.8,64.8
60	2288	622.7	401.1	625.4	2379	950.5	180.4	1203	50- 60	1185	5475	82.7,82.7
70	839.1	215.0	153.4	205.0	637.3	153.9	137.6	162.1	60- 70	807.9	6283	94.9,94.9
80	69.71	78.53	78.56	76.46	65.29	65.82	73.51	74.38	70- 80	266.5	6549	99,99
90	2.174	2.334	2.362	1.080	1.047	0.3713	0.3002	0.6304	80- 90	56.19	6606	99.8,99.8
100	0.8267	0.2281	0.2000	0.1874	1.132	0.6252	0.6771	0.3910	90-100	0.8454	6607	99.8,99.8
110	0.8269	0.1857	0.0751	0.0375	2.484	1.488	2.185	0.9046	100-110	0.8591	6607	99.8,99.8
120	1.478	0.2302	0.0751	0.0728	2.932	2.775	4.851	1.544	110-120	1.386	6609	99.9,99.9
130	2.639	1.126	0.3375	0.5895	2.932	3.329	3.241	1.783	120-130	1.576	6610	99.9,99.9
140	3.081	2.636	1.651	1.650	3.049	3.738	1.579	1.972	130-140	1.638	6612	99.9,99.9
150	3.759	4.453	3.530	3.499	3.223	4.456	2.072	2.431	140-150	1.920	6614	99.9,99.9
160	3.759	4.877	4.802	3.727	3.716	4.977	3.154	3.147	150-160	1.800	6616	100,100
170	3.879	6.583	5.168	4.465	4.047	5.563	4.057	4.606	160-170	1.284	6617	100,100
180	4.661	7.353	5.179	4.695	4.886	6.164	5.029	5.447	170-180	0.5109	6617	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd SUR.:		Shielding Angle:N/A

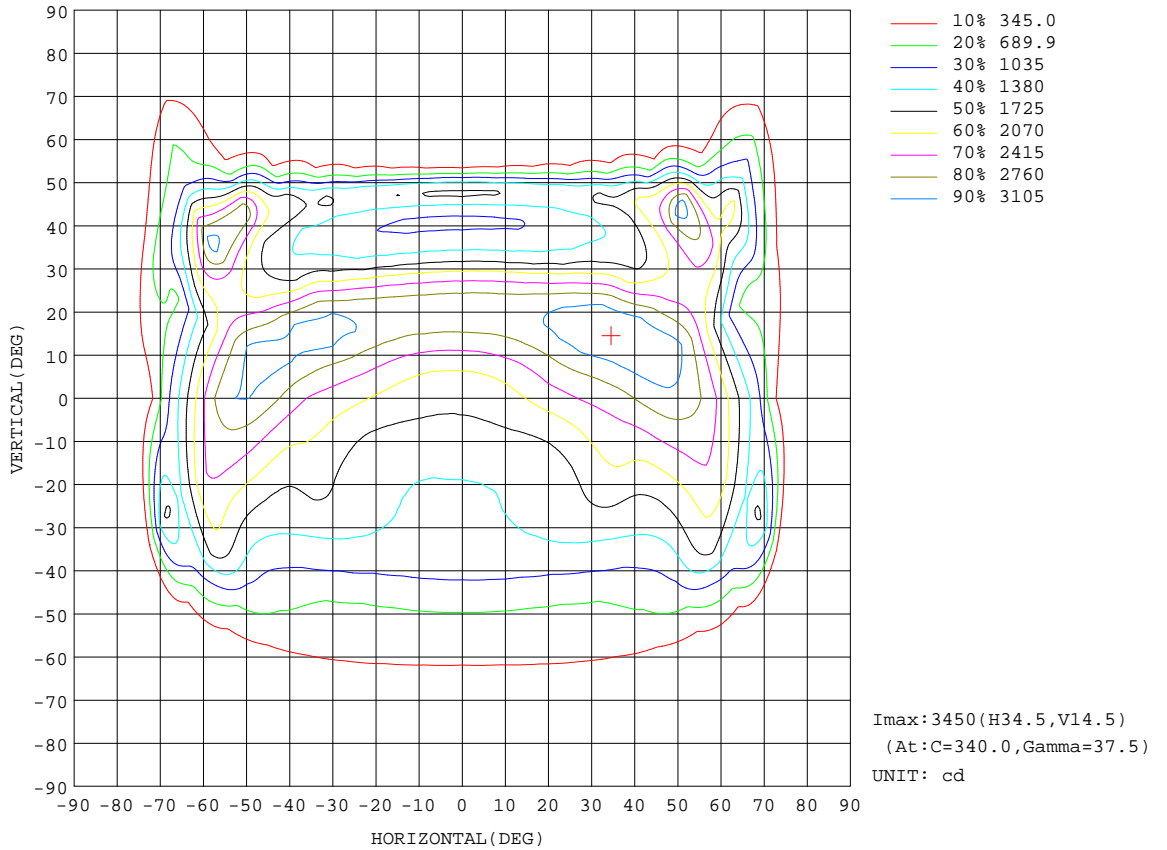

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity: 56.4%
 Test Distance: 26.000m [K=1.4046]
 Remarks:

Planar Illuminance Curve

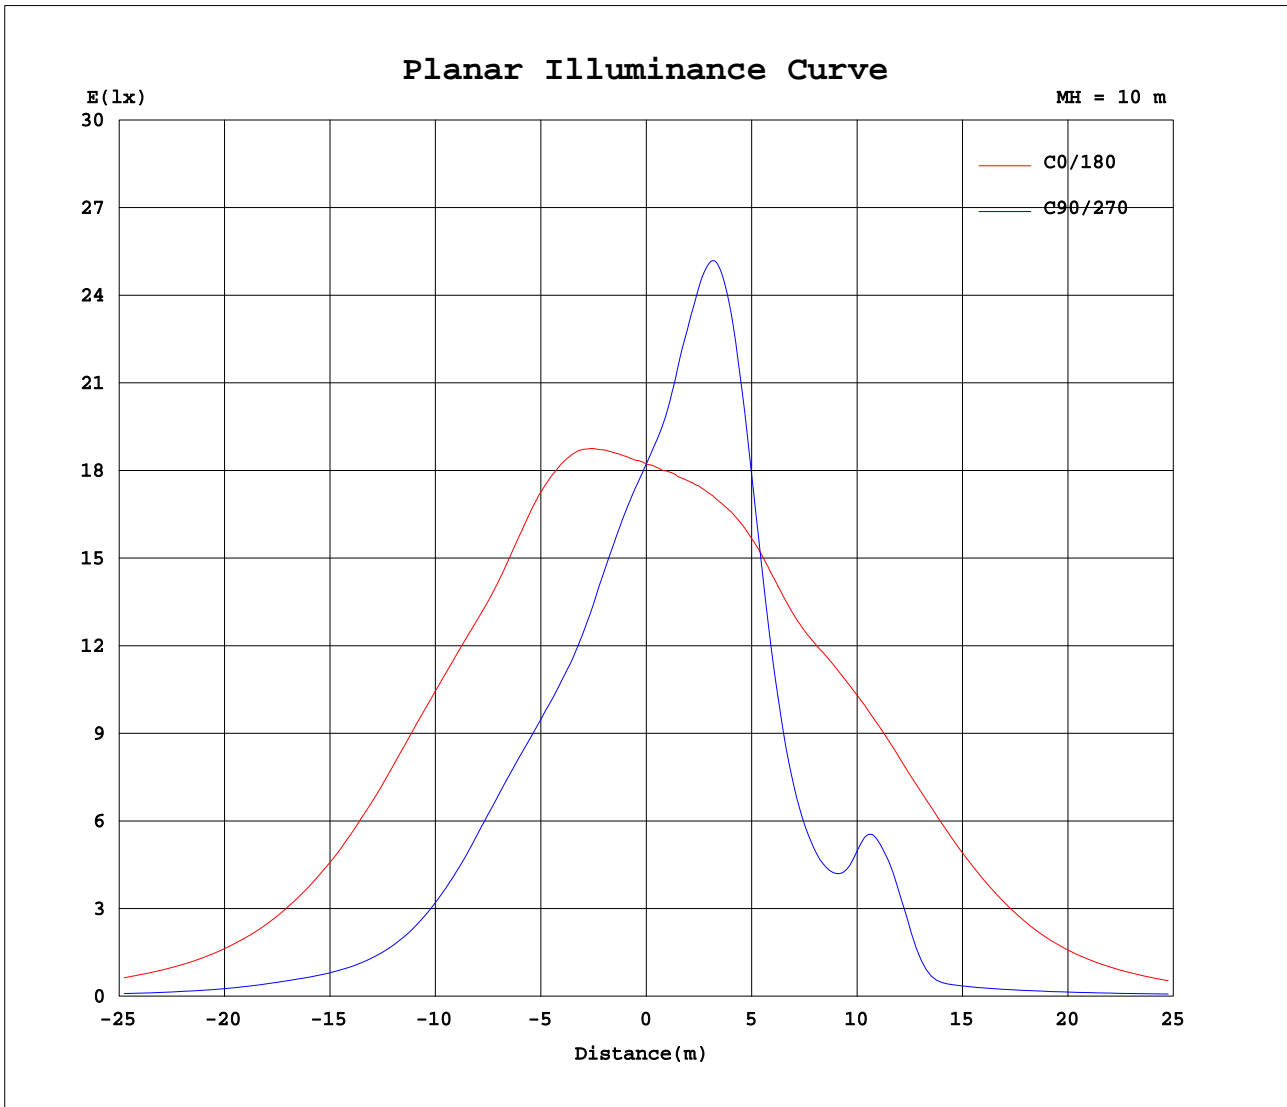


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
Humidity: 56.4%
Test Distance: 26.000m [K=1.4046]
Remarks:

LCS REPORT

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd	SUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

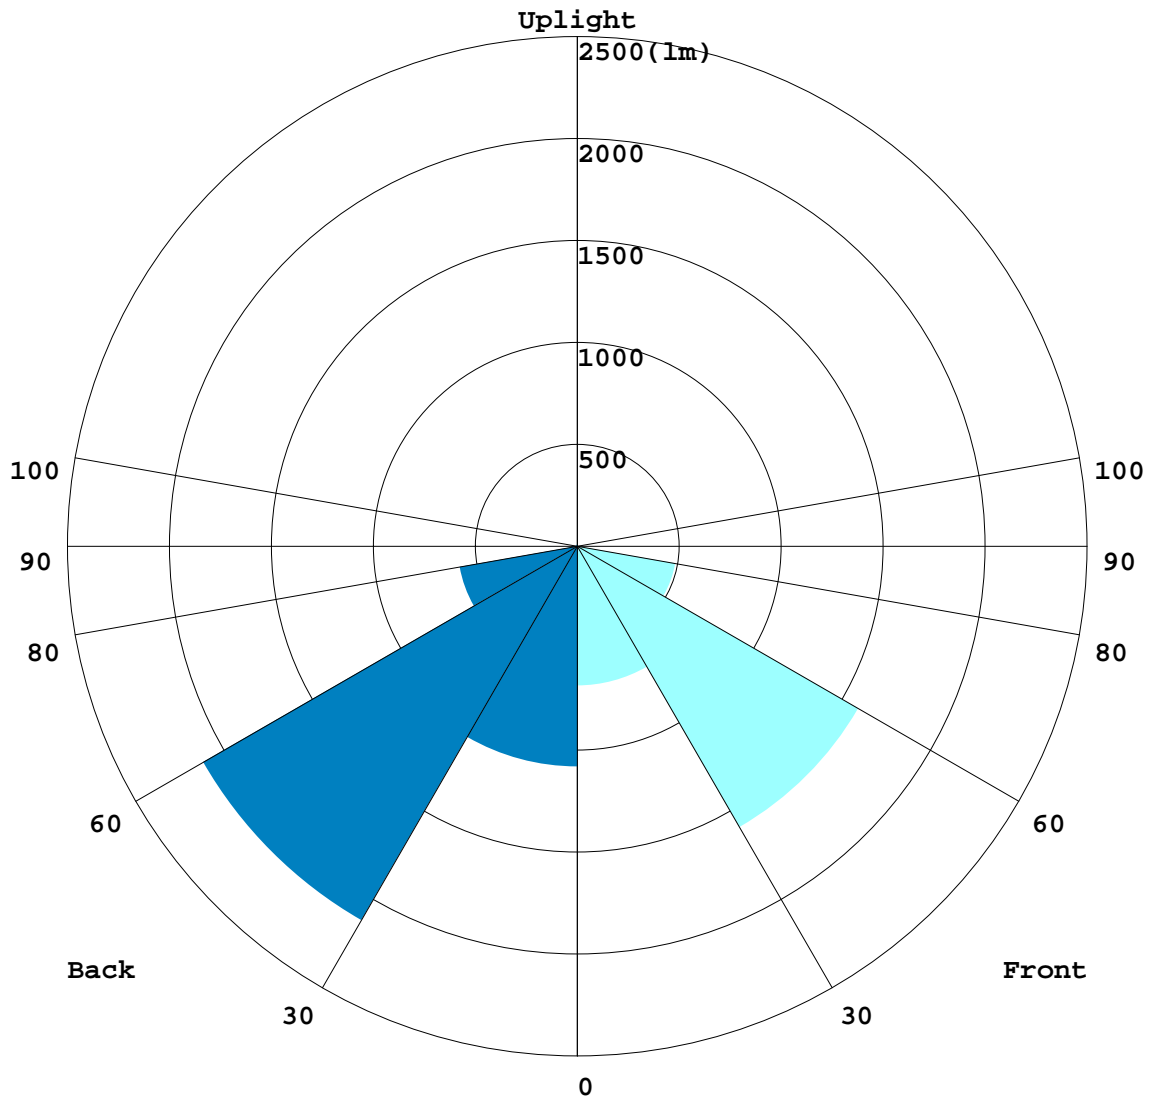

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

BUG REPORT

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	683.82	10.3
FM - Front-Medium(30-60)	1591.8	24.1
FH - Front-High(60-80)	488.83	7.4
FVH - Front-Very High(80-90)	25.045	0.4
Total Forward Light	2794	42.2

BL - Back-Low(0-30)	1081.1	16.3
BM - Back-Medium(30-60)	2118.4	32.0
BH - Back-High(60-80)	585.57	8.8
BVH - Back-Very High(80-90)	31.147	0.5
Total Back Light	3823.5	57.8

UL - Uplight-Low(90-100)	0.84544	0.0
UH - Uplight-High(100-180)	10.974	0.2
Total Up Light	11.819	0.2

BUG(Back,Up,Glare) Rating	B3-U2-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	3816.1	7.3292	3823.5
Street Side	2789.5	4.49	2794


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd SUR.:		Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

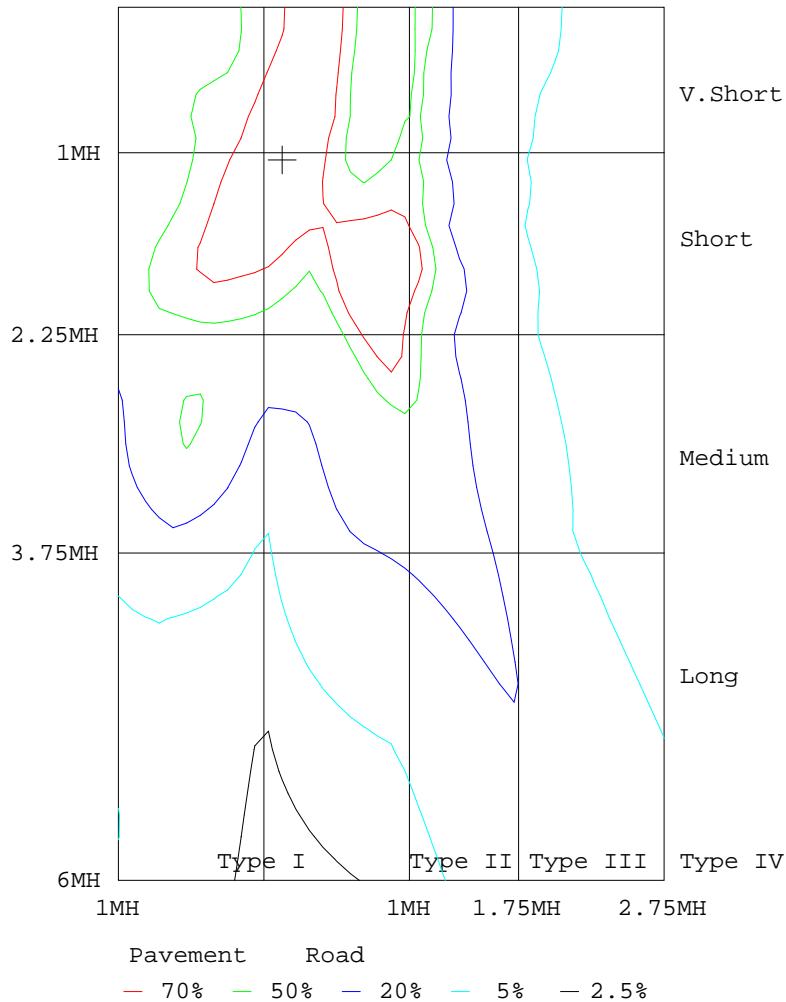

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd SUR.:		Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823
5	1868	1838	1813	1788	1764	1742	1723	1712	1700	1699	1699	1702	1708	1722	1732	1754	1775	1796	1821
10	1955	1891	1829	1764	1711	1665	1625	1600	1583	1575	1574	1582	1601	1627	1659	1707	1755	1806	1856
15	2082	1971	1843	1723	1628	1562	1510	1480	1457	1450	1448	1459	1478	1518	1568	1642	1733	1834	1929
20	2228	2037	1837	1667	1547	1475	1430	1397	1377	1367	1370	1377	1398	1432	1487	1580	1713	1875	2030
25	2370	2113	1868	1662	1534	1464	1418	1378	1350	1332	1336	1349	1378	1411	1467	1572	1730	1930	2155
30	2488	2212	1971	1729	1581	1492	1427	1366	1325	1310	1310	1332	1374	1427	1493	1624	1819	2026	2266
35	2587	2290	2076	1817	1627	1504	1394	1311	1270	1255	1263	1287	1347	1437	1543	1732	1938	2115	2376
40	2769	2298	2050	1828	1577	1410	1261	1176	1132	1118	1128	1161	1234	1364	1515	1761	1912	2134	2619
45	2958	2350	1824	1597	1386	1188	1033	952	919	908	914	947	1020	1174	1365	1555	1769	2276	2915
50	3016	2406	1777	1410	1135	919	775	712	685	675	687	709	771	911	1128	1406	1777	2434	3117
55	2795	2438	1817	1204	879	673	574	527	506	504	511	524	566	667	877	1202	1787	2511	2990
60	2288	2341	1957	1068	721	524	468	429	404	401	409	426	462	523	728	1085	1962	2471	2379
65	1608	1706	1662	781	491	387	324	280	256	252	259	279	319	380	478	772	1707	1713	1507
70	839	1707	804	349	242	188	166	160	155	153	155	160	167	185	225	320	746	1744	637
75	146	710	157	120	124	118	112	107	102	100	102	107	111	117	122	117	131	504	120
80	69.7	116	97.2	81.5	79.4	77.6	78.2	78.0	78.1	78.6	78.5	77.8	77.1	76.0	76.9	84.9	117	161	65.3
85	30.2	55.6	56.4	40.9	41.5	43.4	46.4	49.6	50.9	50.7	50.8	49.1	45.0	41.0	37.9	36.6	54.6	66.6	27.9
90	2.17	2.63	2.66	2.36	2.26	2.41	3.16	3.39	3.09	2.36	2.30	1.84	1.38	1.07	1.09	1.36	1.98	2.04	1.05
95	0.98	0.98	0.97	0.67	0.55	0.37	0.39	0.42	0.41	0.30	0.32	0.35	0.38	0.30	0.31	0.60	0.98	1.13	0.95
100	0.83	0.68	0.90	0.52	0.22	0.23	0.20	0.17	0.21	0.20	0.15	0.20	0.14	0.15	0.22	0.37	0.83	0.90	1.13
105	0.83	0.75	0.90	0.52	0.22	0.15	0.22	0.15	0.15	0.08	0.08	0.00	0.08	0.00	0.07	0.37	0.83	0.90	1.73
110	0.83	0.83	0.90	0.52	0.22	0.15	0.07	0.15	0.15	0.08	0.00	0.00	0.00	0.00	0.07	0.37	0.83	0.90	2.48
115	1.35	1.40	0.90	0.52	0.22	0.15	0.07	0.15	0.15	0.08	0.00	0.00	0.00	0.00	0.07	0.37	0.83	1.05	2.93
120	1.48	1.55	1.02	0.57	0.31	0.15	0.07	0.15	0.15	0.08	0.00	0.00	0.00	0.00	0.15	0.37	0.83	1.23	2.93
125	2.48	2.18	1.72	1.27	0.81	0.44	0.07	0.15	0.15	0.16	0.15	0.00	0.08	0.15	0.37	0.90	1.27	1.66	2.93
130	2.64	2.60	2.47	1.78	1.29	0.96	0.45	0.45	0.28	0.34	0.21	0.20	0.38	0.47	0.71	1.34	1.70	2.15	2.93
135	2.72	2.63	2.67	2.43	2.23	1.33	1.21	1.12	1.08	0.90	0.67	0.67	0.69	0.77	1.12	1.57	1.86	2.27	3.01
140	3.08	3.68	3.52	3.19	2.90	2.38	2.23	1.87	1.72	1.65	1.35	1.38	1.43	1.58	1.72	2.25	2.63	2.94	3.05
145	3.80	3.83	3.74	3.76	3.63	3.65	3.72	2.84	2.54	2.59	2.41	2.40	2.40	2.48	2.40	2.59	2.97	3.32	3.12
150	3.76	3.83	4.19	4.23	4.53	4.38	3.87	3.73	3.49	3.53	3.38	3.22	3.30	3.54	3.46	3.00	3.28	3.55	3.22
155	3.76	3.83	4.27	4.69	4.77	4.82	4.10	3.94	3.94	4.07	3.84	3.78	3.72	3.64	3.59	3.75	3.76	3.55	3.43
160	3.76	3.83	4.37	4.81	4.80	4.95	4.54	4.51	4.78	4.80	4.74	3.99	3.81	3.74	3.72	3.78	3.78	3.55	3.72
165	3.76	3.83	4.46	4.93	5.11	5.63	5.21	4.66	4.94	4.95	4.94	4.81	4.80	3.91	3.88	3.81	3.80	3.69	3.80
170	3.88	4.05	4.86	5.35	5.97	7.20	7.73	4.88	5.05	5.17	5.02	5.49	5.49	4.58	4.35	3.96	3.83	3.72	4.05
175	4.53	4.77	5.27	5.99	6.24	8.17	10.8	5.00	5.05	5.13	5.00	6.13	6.09	4.87	4.52	4.17	4.06	4.10	4.66
180	4.66	4.73	5.39	5.94	6.39	8.32	11.9	5.23	5.01	5.18	4.97	6.32	6.09	4.82	4.57	4.20	4.13	4.15	4.89

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:31.00V I:1.161A P:36.00W PF:0 Freq:0Hz Lamp Flux:6617.49x1 lm		
NAME: all-in-one solar led street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Tismat Lighting Technology Co. Ltd SUR.:		Shielding Angle:N/A

Table--2

UNIT: cd

C(DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823	1823		
5	1846	1869	1896	1914	1939	1957	1979	1986	2000	1997	1991	1982	1970	1947	1935	1913	1890		
10	1907	1966	2027	2096	2169	2236	2288	2317	2340	2329	2311	2278	2232	2164	2113	2053	2007		
15	2031	2143	2254	2380	2496	2591	2670	2713	2739	2729	2692	2634	2565	2470	2374	2282	2182		
20	2210	2378	2551	2720	2832	2924	2954	2966	2967	2977	2977	2954	2898	2814	2691	2549	2413		
25	2392	2651	2880	3002	2995	2904	2787	2714	2693	2735	2816	2942	3054	3090	3027	2844	2618		
30	2576	2976	3138	3010	2698	2379	2145	2013	1977	2044	2196	2445	2800	3130	3315	3156	2791		
35	2818	3241	3129	2564	1998	1623	1419	1331	1311	1352	1464	1711	2165	2778	3352	3402	2994		
40	3092	3227	2698	1868	1345	1121	1033	1011	1009	1022	1065	1204	1538	2140	2939	3409	3234		
45	3296	2793	1871	1407	1121	1071	1194	1350	1409	1325	1169	1093	1265	1600	2141	3080	3405		
50	3187	2192	1443	1296	1411	1700	1654	1470	1412	1499	1677	1628	1395	1403	1704	2537	3285		
55	2593	2006	1639	1787	1629	792	348	236	226	247	413	949	1741	1766	1940	2207	2655		
60	1794	2588	2557	1512	389	209	181	180	180	182	184	217	530	1874	2795	2428	1680		
65	1060	3221	2253	327	184	156	153	155	156	157	154	162	194	486	2884	2377	815		
70	691	2114	423	175	133	125	132	136	138	138	134	128	139	186	637	2231	574		
75	637	879	191	114	98.1	91.6	89.3	90.0	91.7	91.7	92.1	96.9	107	118	206	1294	463		
80	111	562	102	67.3	64.3	66.8	71.8	73.9	73.5	73.4	71.4	68.5	69.1	79.6	127	583	86.6		
85	34.7	143	43.6	27.2	39.0	49.2	49.5	42.7	41.3	43.7	49.6	49.9	40.5	32.9	56.8	120	37.0		
90	1.27	1.18	4.33	0.37	0.37	5.47	0.45	2.88	0.30	0.45	4.45	0.37	0.51	0.75	2.23	3.90	3.28		
95	1.20	1.00	1.46	0.42	0.41	0.38	0.45	0.78	0.47	0.37	1.20	0.30	0.33	0.31	0.77	1.05	0.93		
100	1.43	1.42	0.82	0.66	0.59	0.76	0.79	0.85	0.68	0.68	0.48	0.39	0.37	0.41	0.80	1.16	0.99		
105	2.11	2.05	1.37	0.90	0.97	1.22	1.27	1.50	1.29	1.20	0.83	0.62	0.58	0.64	1.16	1.51	1.45		
110	2.63	2.42	1.80	1.41	1.56	2.01	2.10	2.77	2.19	2.03	1.43	0.90	0.76	1.05	1.53	1.80	1.97		
115	2.70	2.52	2.23	1.93	2.45	3.35	3.07	4.27	3.68	3.09	2.18	1.34	1.18	1.31	1.65	1.80	2.11		
120	2.70	2.56	2.30	2.45	3.09	4.65	3.66	4.82	4.85	3.27	2.50	1.74	1.51	1.57	1.65	1.80	2.11		
125	2.70	2.60	2.38	2.64	3.52	4.69	3.70	4.64	4.58	2.93	2.33	2.03	1.61	1.62	1.65	1.80	2.11		
130	2.70	2.50	2.47	2.75	3.91	3.79	3.89	3.14	3.24	2.48	2.26	2.03	1.88	1.68	1.65	1.80	2.11		
135	2.70	2.60	2.75	2.93	4.14	2.58	4.44	2.83	2.99	2.11	2.49	2.03	1.94	1.72	1.65	1.80	2.11		
140	2.75	2.65	2.84	3.05	4.43	4.25	5.23	1.47	1.58	2.11	4.74	1.96	2.03	1.91	1.84	1.97	2.23		
145	2.78	2.76	2.99	3.42	4.67	5.96	5.30	1.65	1.68	2.11	5.94	2.25	2.31	2.06	2.00	2.17	2.35		
150	3.03	3.06	3.43	4.24	4.68	7.45	5.37	2.00	2.07	2.22	6.07	2.93	2.56	2.30	2.18	2.38	2.56		
155	3.40	3.60	4.12	4.76	4.68	7.67	5.61	2.54	2.62	2.52	6.02	3.91	2.94	2.76	2.72	2.71	2.87		
160	3.75	3.87	4.30	4.95	5.00	7.67	7.02	3.07	3.15	3.07	5.97	4.82	3.13	3.16	3.00	3.08	3.21		
165	3.84	4.04	4.39	5.07	5.33	7.67	9.41	3.52	3.62	3.46	4.88	5.88	4.14	3.55	3.42	3.38	3.43		
170	4.13	4.34	4.68	5.26	5.87	7.69	11.0	4.19	4.06	3.99	4.25	6.17	5.35	3.87	3.83	3.69	3.70		
175	4.53	4.71	5.20	5.80	6.46	8.12	11.8	5.10	4.50	4.44	4.37	6.26	6.04	4.42	4.41	4.27	4.06		
180	4.65	4.71	5.35	5.94	6.39	8.34	12.0	5.16	5.03	5.04	4.96	6.32	6.10	4.80	4.57	4.21	4.15		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2021-03-31

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:56.4%
 Test Distance:26.000m [K=1.4046]
 Remarks: