

# SZG113 series of high power led high bay light




## Applications:

- plant, workshop, warehouse, etc.
- coal shed, cargo shed, logistics center, etc.
- convention and exhibition centre
- exhibition hall
- reception hall
- terminal waiting hall
- indoor sports venues



## Descriptions of performance:

brand of led chip	luminous efficacy of led chip	luminous efficacy of luminaire	wide input voltage	power efficiency	power factor
PHILIPS	240 lm/W	180 lm/W	90~305 Vac	≥94%	≥0.95
total harmonic distortion	surge lightning protection	beam angle	shell material	IP protection	
≤10%	6000 KV	60° / 90° / 120°	ADC12 die-cast aluminum	IP66	

## Product profile:







300W (Circular power supply/bar power supply)



500W (Circular power supply/bar power supply)


**Product sizes:**

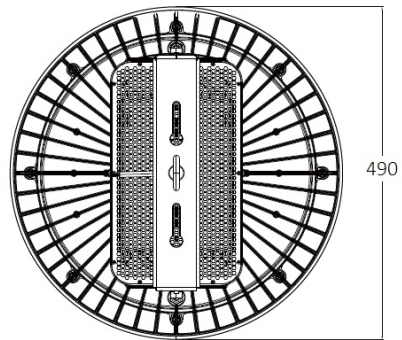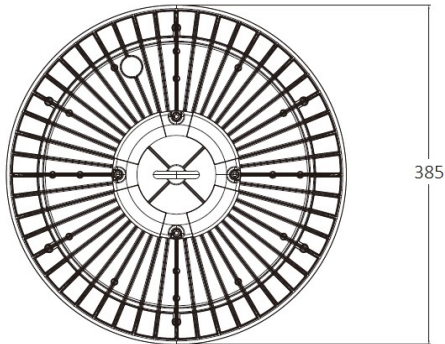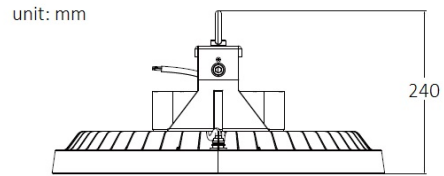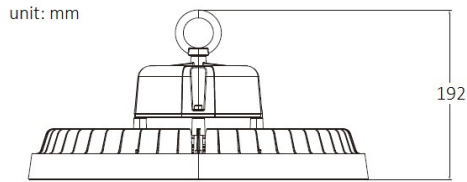

size of 300W

size of 500W


**Picture of explode product:**

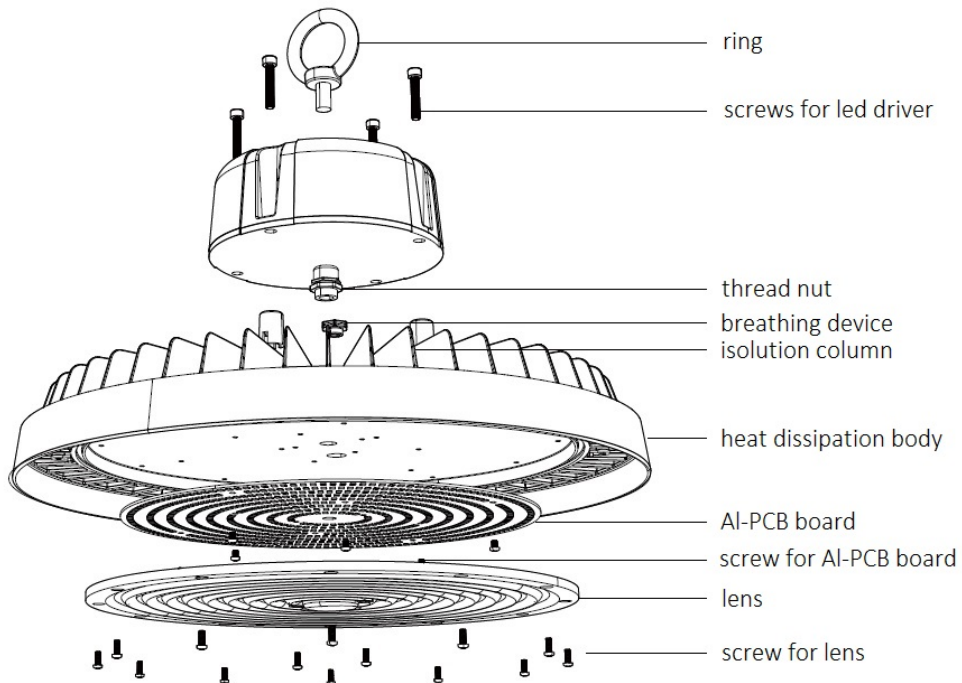

## Technical parameters:

Parameter items	300W	500W
Input voltage (V)	100-305Vac	100-305Vac
Power efficiency	≥94%	≥94%
Power factor	≥0.95	≥0.95
Surge lightning protection (V)	6000	6000
Total harmonic distortion	≤10%	≤10%
Quantity of led chip (pcs)	480	1400
Luminous efficiency for led (lm/W)	225	240
Total luminous flux (lm)	67,500±5%	120,000±5%
Light efficiency for luminaire (lm/W)	170	180
Correlated color temperature (K)	3000-6500	3000-6500
Color rendering index (Ra)	≥75	≥75
Beam angle (°)	90° / 120°	60° / 90° / 120°
LED lifespan (h)	≥100,000	≥100,000
Working temperature (°C)	-40~+50°C	-40~+50°C
IP protection	IP66	IP66
IK protection	IK08	IK08
Installation mode of led driver	external	external
Dimensions (mm)	φ 385*192	φ 490*240
Weight (Kg)	4.0	5.5
Mounting mode	Ring/U-bracket	Ring/U-bracket
Warranty	5 year	5 year

**Note:** reflector optional

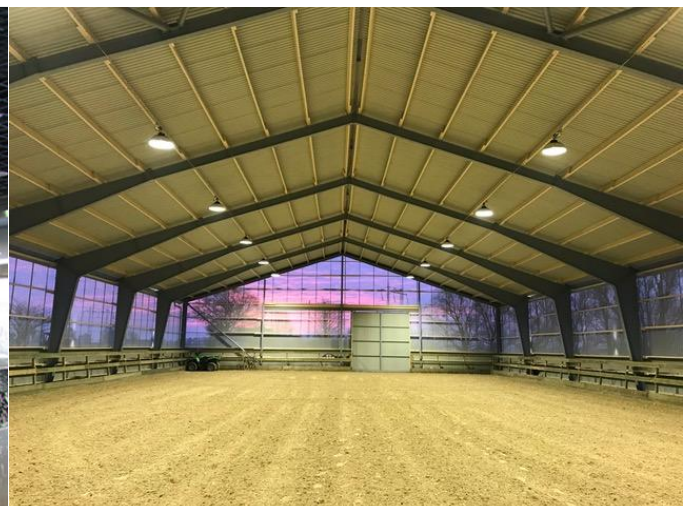

## Test report of luminous efficiency of led chip:



**EVERFINE** 远方

Test report

EVERFINE LEDspec Test Report

4 Of 4

### Spectrum Test Report

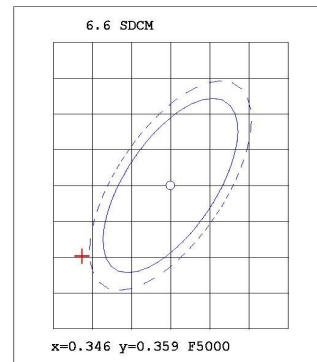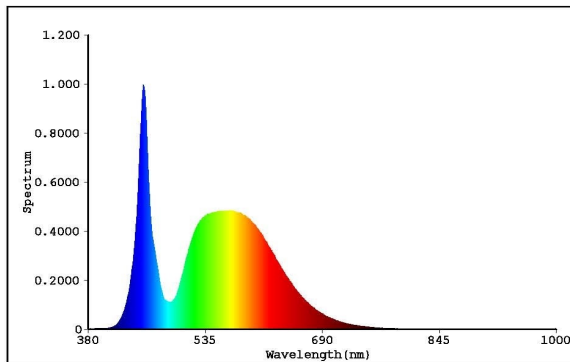

#### Color Parameters:

Chromaticity Coordinate(2Deg): $x=0.3347$   $y=0.3492$ / $u'=0.2053$   $v'=0.4819$   $duv=3.134e-003$

Tc=5410K Dominant WL:Ld=558.0nm Purity=5.2%

Ratio:R=14.0% G=82.2% B=3.8% Peak WL:Lp=453.1nm HWL:17.2nm

Render Index:Ra=75.9

R1 =73.76      R2 =81.05      R3 =84.21      R4 =75.46      R5 =73.73

R6 =72.76      R7 =84.81      R8 =61.67      R9 =-15.45      R10=52.76

R11=71.59      R12=42.32      R13=75.35      R14=90.99      R15=69.42

TM30 Parameters: Rf = 74.3, Rg:93.3

#### Photo Parameters:

Flux = 50.96 lm Eff. : 241.29 lm/W Fe = 153.5 mW

#### Electrical parameters:

VF = 5.294 V IF = 39.90 mA P = 211.2 mW Ch1

LEVEL:\*\*[OUT] WHITE:ANSI\_5700K

Status: T=201.00ms Ip=26653 (41%) [ HAAS1200\_V1\_USB ] V2.00.288

Model:40MA  
 Tester:D.U.01.0151 24V  
 Temperature:25.3Deg  
 Manufactory:EVERFINE  
 Assessor:damin  
 System:WY + HAAS1200\_V1\_USB

Number:5  
 Date:2021-06-05 16-41  
 Humidity:65.0%  
 Remarks:---