

SNF288 series of led street light



Applications:

- expressway roads
- urban main roads, secondary roads
- economic development zone and high-tech park road
- industrial and mining plant road
- tourist attractions
- resort road
- park, parking roads

Description of performances:

test report IEC 60598/IEC 62741 IEC 61000/IEC 61547 EN55015 LM80 / LM79	brand of led chip PHILIPS	luminous efficacy of led chip 210 lm/W	luminous efficacy of luminaire 155-160 lm/W	brand of led driver Inventronics /Sosen	wide input voltage 90~305 Vac
power factor ≥0.95	total harmonic distortion ≤10%	surge lightning protection 6000 KV	adjustable angle -90°~+90°	heat dissipation of power cavity ventilation design to enhance heat dissipation	IP protection IP66

Product details:



190lm/W Philips led chip



convection aluminum heat dissipation



ventilation supply chamber



adjustable tilt

Technical parameters:

Parameter items	50W	100W	150W	200W	250W
Input voltage (V)	90-305Vac	90-305Vac	90-305Vac	90-305Vac	90-305Vac
Power efficiency	91%	91%	91%	91%	91%
Power factor	0.98	0.98	0.98	0.98	0.98
Surge lightning protection (V)	6000	6000	6000	6000	6000
Total harmonic distortion	≤10%	≤10%	≤10%	≤10%	≤10%
Quantity of led chip (pcs)	56	112	168	224	280
Luminous efficiency for led (lm/W)	210	210	210	210	210
Total luminous flux (lm)	10500±5%	21000±5%	31500±5%	42000±5%	52500±5%
Light efficiency for luminaire (lm/W)	155-160	155-160	155-160	155-160	155-160
Correlated color temperature (K)	3000-6500	3000-6500	3000-6500	3000-6500	3000-6500
Color rendering index (Ra)	≥75	≥75	≥75	≥75	≥75
Beam angle (°)	140° *70°	140° *70°	140° *70°	140° *70°	140° *70°
LED lifespan (h)	100,000	100,000	100,000	100,000	100,000
Working temperature (°C)	-40~+55°C	-40~+55°C	-40~+55°C	-40~+55°C	-40~+55°C
IP protection	IP66	IP66	IP66	IP66	IP66
IK protection	IK08	IK08	IK08	IK08	IK08
Installation mode of led driver	built-in	built-in	built-in	built-in	built-in
Dimensions (mm)	460*315*80	540*315*80	620*315*80	700*315*80	780*315*80
Weight (Kg)	5.0	6.0	7.0	8.0	9.0
Installation of pipe diameter (mm)	φ 60	φ 60	φ 60	φ 60	φ 60
Warranty	5 year	5 year	5 year	5 year	5 year



Test report of luminous efficiency of led chip:



EVERFINE 远方

Test report

EVERFINE LEDspec Test Report

2 Of 4

Spectrum Test Report

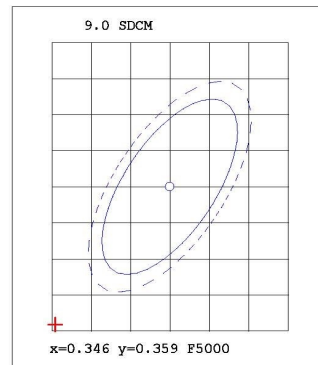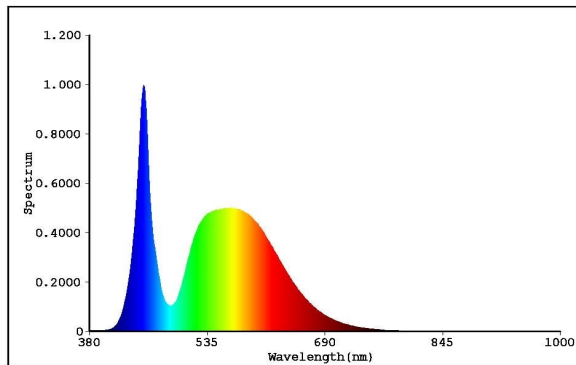

Color Parameters:

Chromaticity Coordinate(2Deg): $x=0.3314$ $y=0.3399$ / $u'=0.2066$ $v'=0.4768$ $duv=-1.324e-004$

Tc=5545K Dominant WL:Ld=536.9nm Purity=1.5%

Ratio:R=14.1% G=82.3% B=3.7% Peak WL:Lp=451.4nm HWL:19.7nm

Render Index:Ra=75.7

R1 =74.64 R2 =79.78 R3 =80.99 R4 =76.68 R5 =74.83

R6 =71.19 R7 =83.59 R8 =63.76 R9 =-11.12 R10=49.49

R11=73.52 R12=44.41 R13=75.32 R14=89.03 R15=71.15

TM30 Parameters: Rf = 72.8, Rg:94.9

Photo Parameters:

Flux = 143.7 lm Eff. : 208.44 lm/W Fe = 440.0 mW

Electrical parameters:

VF = 5.750 V IF = 119.9 mA P = 689.4 mW Ch1

LEVEL:** [OUT] WHITE:ANSI_5700K

Status: T=140.00ms Ip=47130 (72%) [HAAS1200_V1_USB] V2.00.288

Model:120MA
 Tester:D.U.01.0151 24V
 Temperature:25.3Deg
 Manufactory:EVERFINE
 Assessor:damin
 System:WY + HAAS1200_V1_USB

Number:3
 Date:2021-06-05 16-40
 Humidity:65.0%
 Remarks:---